

## ACCESS DOORS



### Access door SOFTLINE

openable with square-socket-key

- Galvanised steel sheet
- White (RAL 9016) or other RAL colour on special order
- Standard dimensions 150 × 150 mm to 600 × 600 mm
- Removable door



### Access door SOFTLINE


with snap lock

- Galvanised steel sheet
- White (RAL 9016) or other RAL colour on special order
- Standard dimensions 200 × 200 mm to 600 × 600 mm
- Closing and opening with a push on the door
- Removable door



### TECHNICAL SPECIFICATION

Access door	Lock type	Hole size, mm
Softline white	square-socket-lock	150 x 150
Softline white	square-socket-lock	150 x 200
Softline white	square-socket-lock	200 x 200
Softline white	square-socket-lock	200 x 250
Softline white	square-socket-lock	200 x 300
Softline white	square-socket-lock	250 x 250
Softline white	square-socket-lock	250 x 300
Softline white	square-socket-lock	300 x 300
Softline white	square-socket-lock	400 x 400
Softline white	square-socket-lock	400 x 600
Softline white	square-socket-lock	500 x 500
Softline white	square-socket-lock	600 x 600
Softline white	square-socket-lock	600 x 800
Softline white	square-socket-lock	800 x 800
Softline white	square-socket-lock	800 x 1000
Softline white	square-socket-lock	1000 x 1000
Softline white	snap lock	200 x 200
Softline white	snap lock	300 x 300
Softline white	snap lock	400 x 400
Softline white	snap lock	500 x 500
Softline white	snap lock	600 x 600

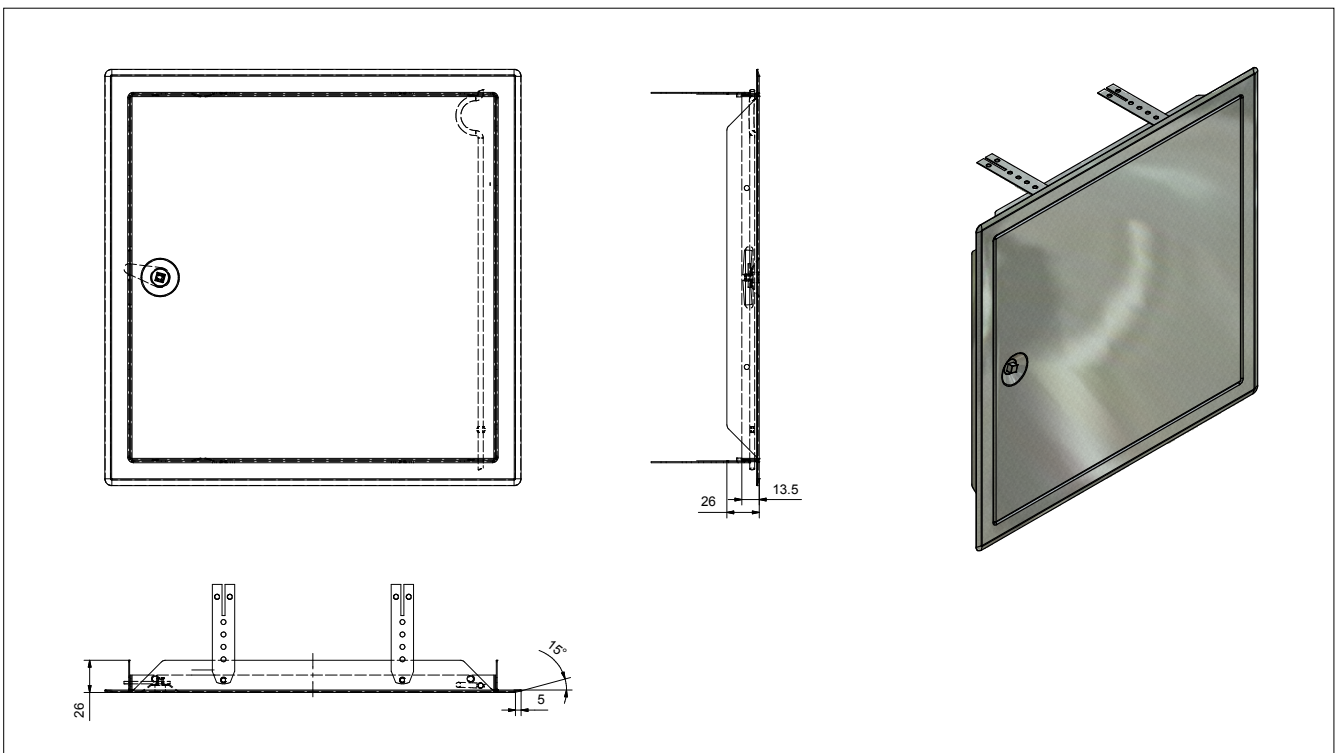

### Access door ALU-STAR Rondo for installation to plasterboard ceiling

- Suitable for installing to 12.5 mm thick plasterboard ceiling
- The door frame is made of aluminium profile
- Closing and opening with a push on the door
- Removable door





### Access door ALU-STAR for installation to plaster board ceiling and wall

- Suitable for installation to 12.5; 15 and 2 × 12.5 mm thick plaster board ceiling and wall
- The door frame is made of aluminium profile
- Standard dimensions 200 × 200 mm to 600 × 600 mm
- Closing and opening with a push on the door
- Removable door



#### TECHNICAL SPECIFICATION

Access door	Hole size, mm
Plaster ceiling and wall access door Alu-Star 12.5 GK	200 x 200
Plaster ceiling and wall access door Alu-Star 12.5 GK	300 x 300
Plaster ceiling and wall access door Alu-Star 12.5 GK	400 x 400
Plaster ceiling and wall access door Alu-Star 12.5 GK	500 x 500
Plaster ceiling and wall access door Alu-Star 12.5 GK	600 x 600
Plaster ceiling and wall access door Alu-Star 12.5 GK	600 x 800
Plaster ceiling and wall access door Alu-Star 12.5 GK	600 x 1000
Plaster ceiling and wall access door Alu-Star 12.5 GK	600 x 1200
Plaster ceiling and wall access door Alu-Star 12.5 GK	800 x 800
Plaster ceiling and wall access door Alu-Star 12.5 GK	800 x 1000
Plaster ceiling and wall access door Alu-Star 12.5 GK	800 x 1200
Plaster ceiling and wall access door Alu-Star 12.5 GK	1000 x 1000
Plaster ceiling and wall access door Alu-Star 12.5 GK	1000 x 1200
Plaster ceiling and wall access door Alu-Star 12.5 GK	1200 x 1200
Alu-Star Rondo, round	Ø 300
Alu-Star Rondo, round	Ø 400
Alu-Star Rondo, round	Ø 600

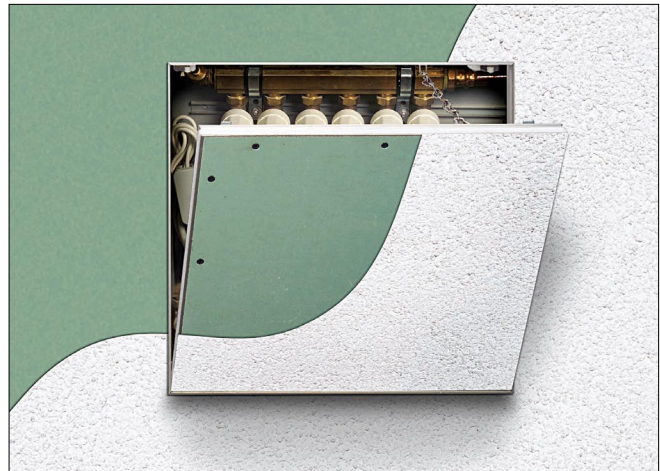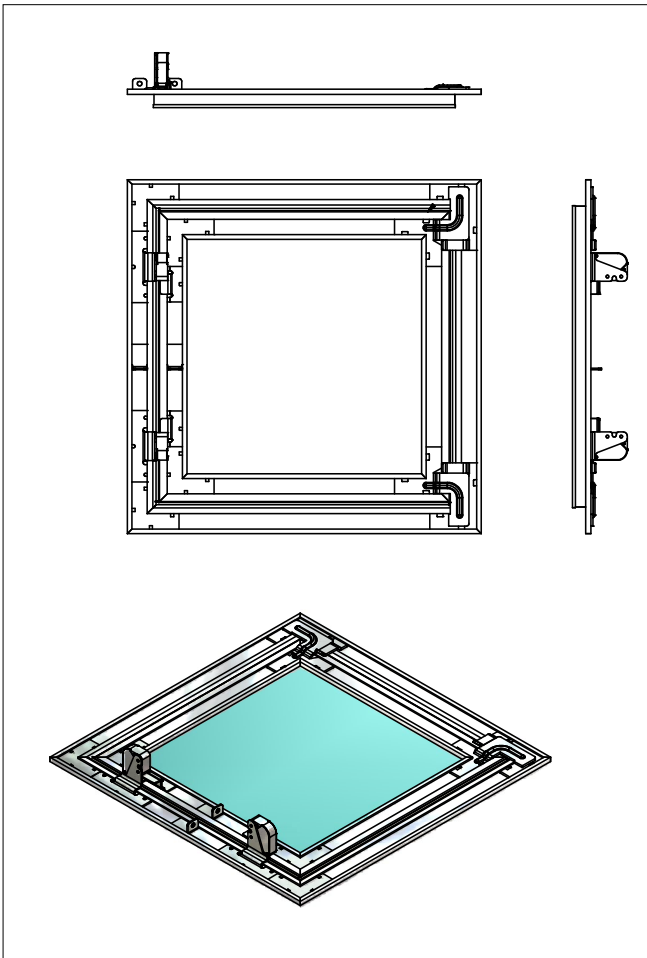

## STUDIOGREEN OÜ

Vabriku 33-7, Tallinn 10411

Tel. +372 656 2600

Fax +372 656 2601

e-mail: [info@studiogreen.ee](mailto:info@studiogreen.ee)

[www.studiogreen.ee](http://www.studiogreen.ee)